

■ **特性 Features:**

- 全电压范围输入: 180-264Vac/250-370Vdc
Full range input voltage: 180-264Vac/250-370Vdc
- 全数字控制, 内置主动式 PFC 功能, PF 高达 0.99
Fully digital control,Built-in active PFC function,PF up to 0.99
- 效率高达 92%
Efficiency up to 92%
- 输出电压可调, 输出低纹波噪声
The output voltage is adjustable,Low ripple & noise
- 辅助电源 12Vaux/0.8A 输出
Auxiliary power supply 12Vaux/0.8A output
- 电源输出 LED 指示灯
PSU output LED indicator
- 内置直流风扇强制风冷, 风扇转速自动调节
Built-in DC fan forced air cooling, Automatic adjustment of fan speed
- 输出短路、过流、过压、过温、恒流、风扇堵转保护功能
With OSP、OCP、OVP、OTP functions、Constant current and fan stall protection function
- 具有遥控开关/遥感功能/DC_OK 信号/温度告警信号输出
With remote ON-OFF/remote sensing function/DC_OK signal output
- 可定制上位机监控电源状态
Customizable upper computer monitoring of power status
- 支持 3+1 并联冗余、均流
Support 3+1 parallel redundancy and current sharing
- 满足 5000M 海拔应用
Meet 5000M altitude application
- 符合 IEC/EN/UL62368、GB4943 等认证标准
Comply with IEC/EN/UL62368, GB4943 Etc.certification standards
- 高可靠性, 基板三防漆工艺, 100%高温老化
High reliability, conformal coating process for substrates,100% high temperature burn-in test
- 5 年质保
5-year warranty



■ **应用 Applications:**

- 工业控制或自动化装置
Industrial control or automation devices
- 电子仪器, 设备和装置
Electronic instruments, equipment and devices
- 机械和电气设备
Mechanical and electrical equipment
- 老化设备
Burn-in equipment

■ 描述 Description:

GSP-2500W 系列是一款 2500W 单组输出 AC 转 DC 电源, 180-264V 交流输入, 整系列提供 12V, 24V 和 48V 直流隔离输出。内置控速风扇散热, 工作温度可达 70°C。含有多种功能如输出电压电流可调, 远程开关控制, 辅助电源。具有完整的保护功能, EMC 性能好, 高可靠性, 安全隔离等优点。产品符合 IEC/UL/EN/BS EN62368、GB4943 等国际安全法规, 符合欧盟 RoHS2.0 指令, 是一款高性能的工业电源。

GSP-2500W series is a 2500W single output AC to DC PSU, 180-264Vac input, The whole series provides 12V, 24V and 48V DC isolated output. Built-in speed fan cooling, working temperature up to 70°C. Contains a variety of functions such as output voltage and current adjustable, remote switch control, auxiliary power. With complete protection function, Excellent EMC performance, high reliability, security isolation and so on. Products comply with IEC/UL/EN/BS EN62368、GB4943 international safety standards and EU RoHS2.0 directive; It is a high performance industrial PSU.

选型规格 Model Selection

功率段 POWER	产品型号 MODEL	输出功率 Pout	输入电压 Vin	输出电压 Vout	输出电流 Iout	满载效率 EFF.	安规认证 SAFETY
2500W	GW-GSP2500W-12	2500W	180-264Vac/ 250-370Vdc	12V	208.4A	87.5%	CE/CQC
	GW-GSP2500W-24	2500W		24V	104.2A	90%	
	GW-GSP2500W-48	2500W		48V	52.1A	91.0%	

*其它安规需求认证中 Other safety requirements are pending certification.



通用参数 General Specification

型号 MODEL		GSP2500W-12	GSP2500W-24	GSP2500W-48
输出 Output	输出电压 Output Voltage	12V	24V	48V
	额定电流 Output Current	208.4A	104.2A	52.1A
	电流范围 Current Range	0~208.4A	0~104.2A	0~52.1A
	额定功率 Output Power	2,500.8W	2,500.8W	2,500.8W
	纹波与噪声 Ripple and Noise(备注 4)	120mV	200mV	200mV
	电压调整范围 Adj-voltage range	2.4~14V	4.8~28V	20~56V
	稳压精度 Voltage stability(备注 2)	±1%	±1%	±1%
	线性调整率 Line regulation	±1%	±1%	±1%

	负载调整率 Load regulation	±1%	±1%	±1%
	保持时间 Hold-up time	8ms (230Vac&100%Load)		
	启动时间 Startup time	≤3000mS (230Vac ; 100% load)		
输入 Input	电压范围 Voltage Range	180~264Vac/250-370Vdc		
	频率范围 Frequency Range	47~63Hz		
	输入电流 Input Current	20A /200Vac		
	功率因数 PF	PF>0.96/20% Pout_rated; PF>0.98/50% Pout_rated; PF>0.99/80%~100% Pout_rated		
	浪涌电流 Inrush Current	60A / 230Vac, Cold start		
	满载效率 Efficiency	87.5%	90%	91%
保护 Protections	过电压 OVP	不超过 Vout_set+5V 最大值小于 19V	不超过 Vout_set+5V 最大值小于 33V	Vout_set*120%~Vout_set*130% 最大值小 60V
	过负载 OCP	105~115%	105~115%	105~115%
	过温度 OTP	异常条件移除后可自动恢复 The PSU can be Auto-recovered when the fault is removed		
	短路 OSP	自锁模式, 重新上电后才能恢复输出 Latch-mode, The PSU can be recovered only after it is powered on again.		
环境 Environmental	工作温度 Operating Temperature	-25 ~ +70°C 请参考降额曲线 Refer to the derating curve		
	工作湿度 Operating Humidity	20% ~ 90% RH		
	存储温度 Storage Temperature	-40 ~ +85°C		
	存储湿度 Storage humidity	10% ~ 95% RH		
安规与电磁兼容 Safety and EMC	安全规范 safety standards	IEC/UL/EN EN62368、EN61558、GB4943		
	耐压 Hi-pot	I/P - O/P: 3000Vac/4242Vdc, I/P - FG: 1800Vac/2545Vdc, O/P - FG: 500Vac/707Vdc		
	绝缘阻抗 Insulating resistance	≥100Mohm (500VDC / 25°C / 90% RH)		
	静电放电 ESD	IEC/EN61000-4-2, Leve4; Contact1±4KV / Air ±8KV ;		
	电磁兼容 EMC	BS EN/EN55032 (CISPR32) , CLASS A		
其它 Others	质保期 Warranty	5Years		
	MTBF	SR-332@40°C, full load, 250,000 小时		

	尺寸 SIZE	278mm * 177.7mm * 63.5mm (L * W * H)
	包装 Packing	3.4KG; 4PCS/14KG/1.8CUFT
备注 Remark	1. 如未特别说明,所有规格参数均在输入为 230Vac, 额定负载, 25°C环境温度下进行测量, 详见测试报告。 All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature, Please refer to the test report. 2. 输出电压的精度包含设定误差、线性调整率和负载调整率。 The voltage tolerance includes set up tolerance, line regulation and load regulation 3. 环境温度高的情况下需减额输出, 具体请参照输出减额曲线图。 In the case of high ambient temperature, the output should be derated. For details, see the output derating curve. 4. 纹波和噪声的测试方法采用双绞线连接, 输出并联 47uF 低 ESR 电容和 0.1uF 陶瓷电容, 在 20MHz 带宽下进行量测。 Ripple & noise are measured at 20MHz bandwidth by using twisted pair-wire terminated with a 47uF (low ESR) & 0.1uF (ceramic) parallel capacitor. *产品免责声明: 产品最终解释权归长城电源技术有限公司所有 详细请参阅网址 https://www.gwpst.com *Disclaimer: The final interpretation rights of the product belong to Great Wall Power Supply Technology Co., Ltd. Details please refer to https://www.gwpst.com	

■ 降额曲线 Derating Curve

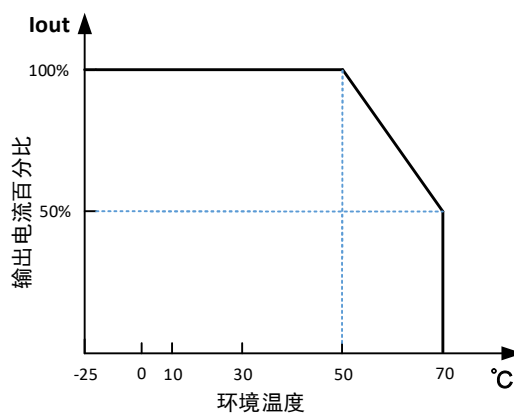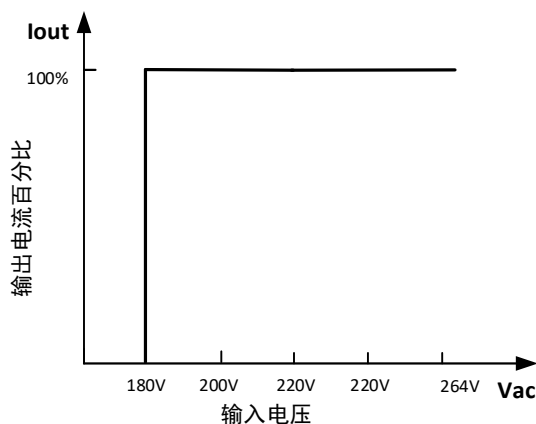


■ 功能手册 Function manual

1. 远端补偿 Remote Sensing

※ 远程感应补偿负载线路上的电压降最高 1V;

The Remote Sense compensates voltage drop on the load wiring up to 1V;

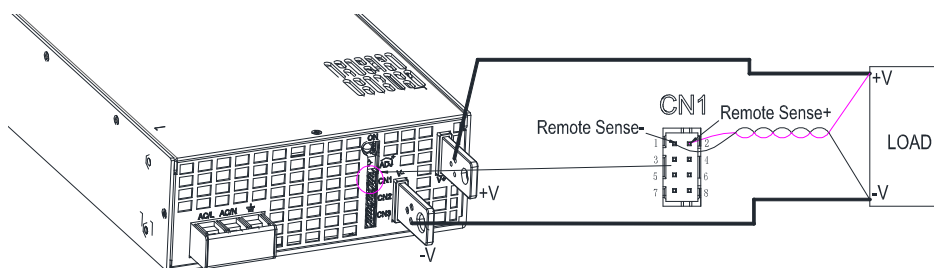


※ 远端补偿只适用于主路输出, 应采用绞线方式, 以减小噪声干扰;

Remote Sensing is only applied to the main output, twisted wire should be used to reduce noise interference;

2. 远程 ON-OFF 控制 Remote ON-OFF

※ 电源可以通过使用“远程开关”功能单独或与其他机台一起打开/关闭。

The power supply can be turned ON/OFF separately or together with other units by using the "Remote ON-OFF" function

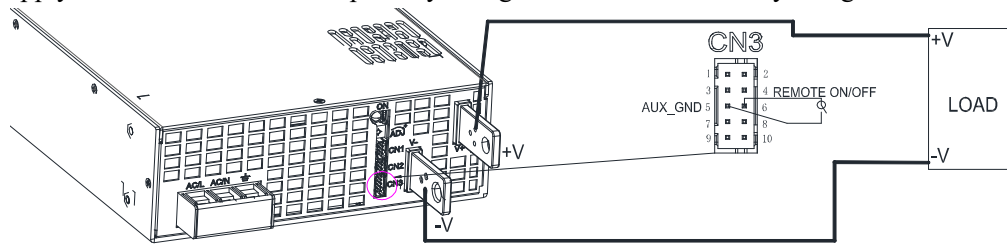


3. 输出电压调整 (PV) Output voltage adjustment (PV)


※ 通过外部所加电压(恒压源), 可以将主路输出电压 12V/24V/48V 调整到满足 2.4V-14V/4.8V-28V/20V-56V, 详见降额表。

According to the external applied voltage (constant voltage source), the output voltage of the main circuit 12V/24V/48V can be adjusted to meet 2.4V-14V/4.8V-28V/20V-56V, as shown in the derating table.


GW-2500W-12 主路输出 PV 调压曲线

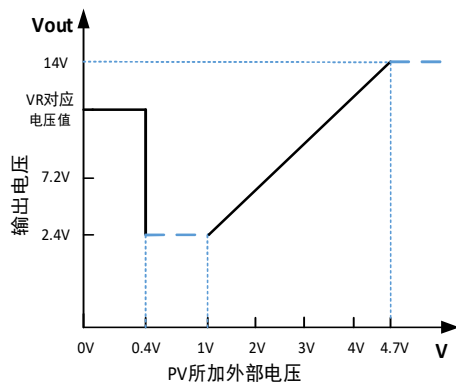


GW-2500W-24 主路输出 PV 调压曲线

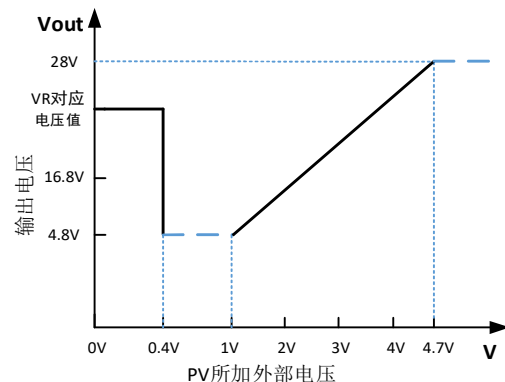

GW-2500W-48 主路输出 PV 调压曲线

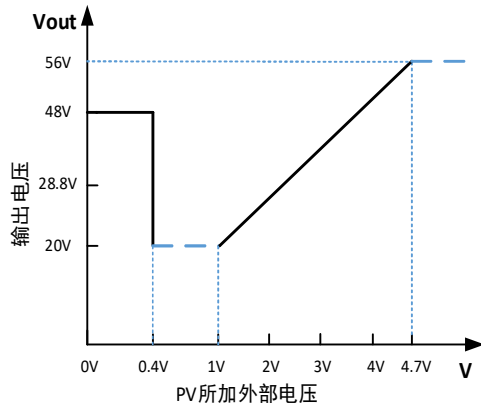

负载曲线

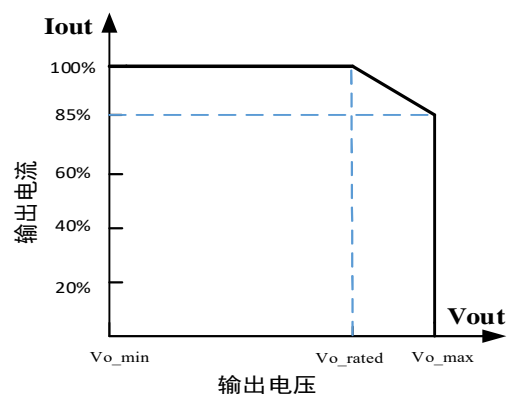

※注意:

1. 测试条件额定输入电压, 输出电压高于 V_{out_rated} 时, 恒功率;
2. 若 PV 端口先施加外加电压, 再开机, 主路输出将由 PV 端口所加电压决定;

※Note:

- 1.Test conditions: Rated input voltage V_{in_rated} ,When the output voltage is higher than the output voltage V_{out_rated} , the power remains constant;
- 2.If an external voltage is applied to the PV port first and then turned on, the main output will be determined by the voltage applied to the PV port;
- 3.When the external voltage source at the PV port loses power or the voltage is less than 0.4V, the main circuit output will be determined by the resistance value at VR. During the adjustment process, the waveform of the main circuit output voltage will be smooth and monotonic.

4. 警报信号输出 Alarm Signal Output

“DC_OK”和“T-ALARM”是警报输出信号，最大输出电流能力 1 mA，最大外部电压是 5.5V。

“DC_OK”and“T-ALARM”is alarm output signal with a maximum output current capacity of 1 mA and a maximum external voltage of 5.5V.

功能 Function	描述 Description	警报输出 Output of alarm	输出状态 Output state
DC_OK	当主路输出电压掉电关机 When the Main Output voltage is established	0-0.8V Low	关 OFF
	当主路输出电压建立，正常输出 When the Main Output voltage is established	4.5-5.5V High	开 ON
T-ALARM	当机台内部温度低于限定温度 When the temperature inside the machine is below the limit temperature	0-0.8V Low	关 OFF
	当机台内部温度超过限定温度/风扇故障 When the console internal temperature exceeds the limit temperature / Fan fault	4.5-5.5V High	开 ON

注：隔离信号，内部上拉，以 GND-AUX 为参考；

Note: Isolation signal, internal pull-up, with GND-AUX as the reference;


5. 选择过载保护模式 Select Overload Protection Type

①短路 CN1 端子的 Pin7 和 Pin8，过流保护模式为：恒电流限制延迟 5 秒后关机，重启自恢复(默认)。

Insert the shorting connector between Pin7&Pin8 on CN1, the Overload Protection Type will be "constant current limiting with delay shutdown after 5 seconds,re-power on to recover". This is the factory default.

②解除 CN1 端子的 Pin7 和 Pin8 的短路，过流保护模式为：持续恒电流限制。


Remove the shorting connector between Pin7&Pin8 on CN1, the Overload Protection Type will be "continuous constant current limiting".



保护模式 1:恒电流限制延迟 5 秒后关机（默认方式）

Overload Protection Type1 (default type):

constant current limiting with delay
shutdown after 5 seconds



保护模式 2:持续恒电流限制

Overload Protection Type 2:

constant current limiting

6. 均流 Current Sharing

GSP2500 具有内置主动式均流功能并且可以并联高达 4 台以提供更高的输出功率:

1. 电源负载线应采用相同的、短且粗的线并联 (长度 $\leq 30\text{cm}$), 然后从并联汇合点连接到负载上;
2. 并联机台间的输出电压差应小于 0.2V ;
3. 总输出电流不得超过下式确定的值:

并联运行时最大输出电流= (每单位额定电流) * (机台数) * 0.9


4. 当总输出电流小于总额定电流的 5%, 或者 (每单位额定电流的 5%) * (机台数) 时, 单位之间共享的电流可能不完全平衡。

GSP2500 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below:

1. The power supplies should be connected in parallel with the same, short and thick wire (length $\leq 30\text{cm}$), and then connected to the Load from the parallel connection point;
2. Difference of output voltages among parallel units should be less than 0.2V .
3. The total output current must not exceed the value determined by the following equation:

Maximum output current at parallel operation = (Rated current per unit) $\times$ (Number of unit) $\times 0.9$

4. When the total output current is less than 5% of the total rated current, or say (5% of Rated current per unit) $\times$ (Number of unit) the current shared among units may not be fully balanced.

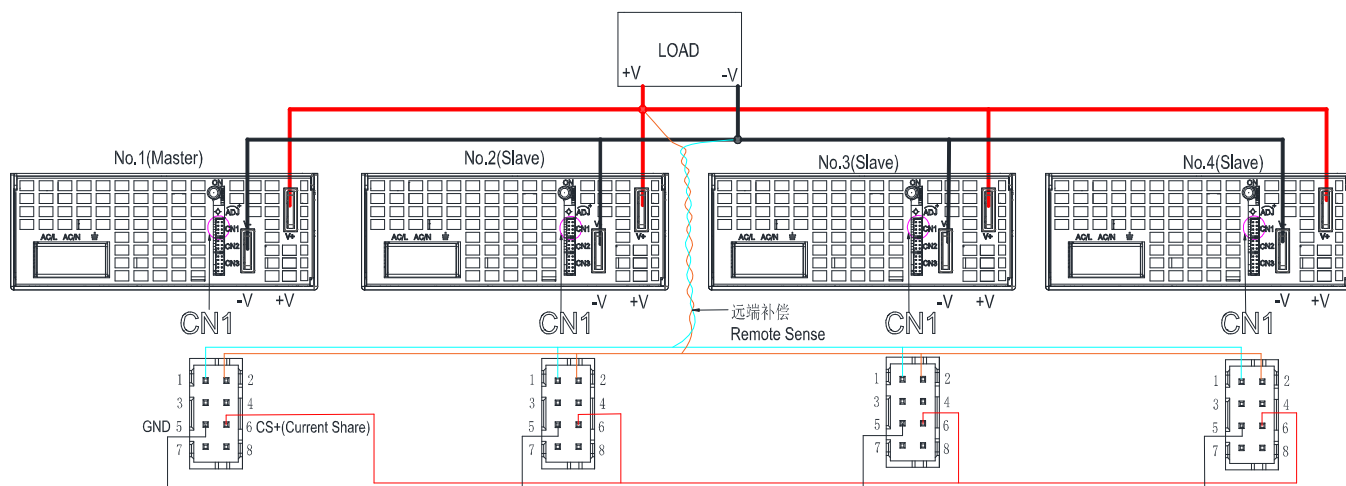


※ 并机通讯信号线 CS+/GND 应采用绞线方式连接, 以减小噪声干扰;

The parallel communication signal line CS/GND should be connected by twisted wire to reduce noise interference;

7. 控制引脚说明 Control pin description


7.1 CN1

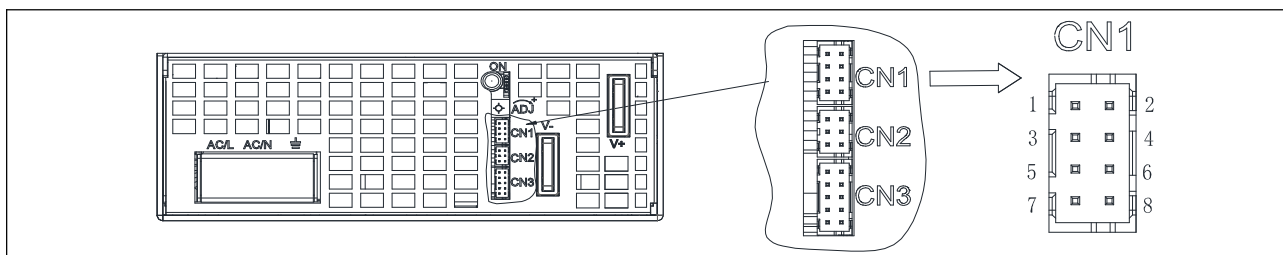

序号 Pin No.	功能 Function	描述 Description
1	Remote Sense-	主路遥感补偿“-”极连接; Main output remote sensing compensation,"-" pole connection;
2	Remote Sense+	主路遥感补偿“+”极连接; Main output remote sensing compensation,"+" pole connection;
3,5	GND	均流信号, PV 供电参考地, 与主路输出(-V)共地 Current Share & PV signal reference ground, Pin connected to the main output ground (- V);
4	PV	可外接电源, 用于主路输出电压调节, 参考地 Pin3; Connect to an external power supply for regulating the main output voltage, reference ground Pin3;
6	CS+(Current Share)	模拟信号, 用于机台均流; 参考地 Pin5; Analog signal for Current Share,reference ground Pin 5
7	OLP	过载保护模式选择
8	OL_SD	Overload(OLP) type select

7.2 CN2 (NC)

7.3 CN3

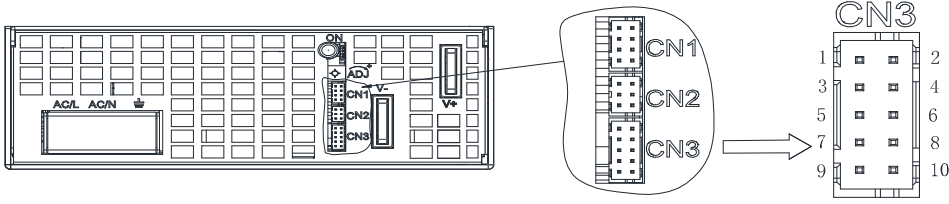		
序号 Pin No.	功能 Function	描述 Description
1,2, 9,10	NC	NC
3	AUX_GND	辅源输出地, 与主路输出是隔离的; Auxiliary voltage output GND,isolated from the output terminals (+V & -V).
4	12V_AUX	辅源输出: 11.4~12.6V, 以 GND-AUX 为参考, 允许最大带载 0.8A; Auxiliary Output:11.4~12.6V, referenced to GND-AUX, The maximum load current is 0.8A
5	AUX_GND	辅路电源 12V_AUX 参考地 12V_AUX Auxiliary voltage output GND
6	REMOTE ON/OFF	机台使能信号, 用于控制机台主路开关机; 开关闭合, 主路关闭; 开关断开, 主路建立; 12V_AUX 不受控制; 注: 隔离信号, 内部 5V 上拉, 以 GND-AUX 为参考 PSU enable signal,used to control the Main Output on/off; SW close, Main Output OFF; SW OFF, Main Output ON; (12V_AUX) is not controlled;; Note:Remote ON-OFF is an isolation signal with GND-AUX as reference, internal pull-up to5V;

7	T-ALARM	温度告警信号 Temperature alarm signal
8	DC_OK	DC_OK 信号 Main Output alarm signal

7.4 LED 指示灯 LED Indicators


指示灯颜色 LED color	机台状态 PSU state	描 述 Description
绿色 GREEN	正常运行 normal	DC-OK, 高电平, 机台主路输出正常输出 DC-OK is high level, PSU Main Output is normal
红色 RED	保护状态 protection	DC-OK, 低电平, 机台因故障处于保护状态, 主路输出无输出 DC-OK is low level, PSU is protected due to fault, Main Output has failed
红色 1S 灯闪 Blinking RED 1s	待机状态 Standby	输入正常, 前级 PFC 工作正常, 主路 Remote ON-OFF 未使能 The input is normal, PFC is normal, Main Output Remote ON-OFF is not enabled;

注: LED 指示灯只与主路输出状态相关, 与辅路输出无关。

Note: The LED indicator light is only related to the Main Output status, not to the Auxiliary Output


结构参数 Mechanical Overview

■ 结构尺寸 Mechanical Specification

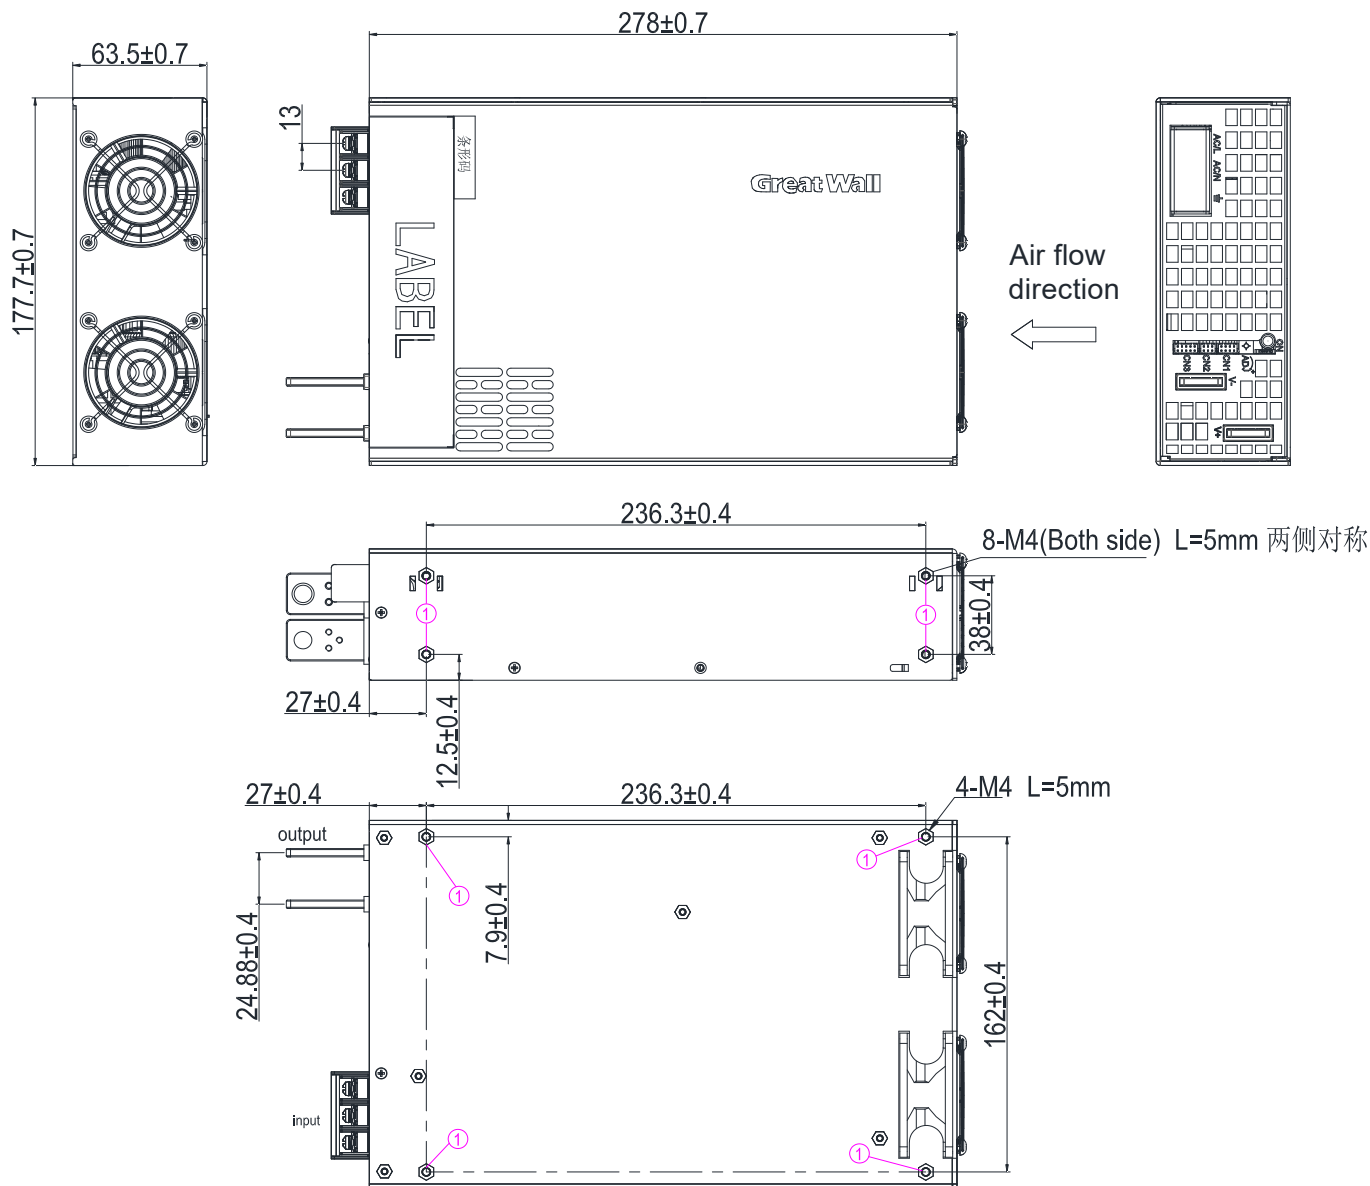

※ 安装指导 Mounting Instruction

孔编号	推荐螺丝型号	最大穿透深度L	推荐安装扭矩
①	M4	5MM	9~14Kgf.cm

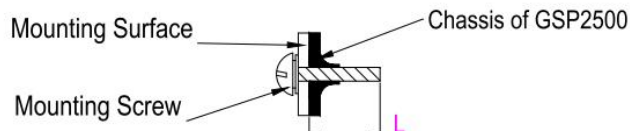

※AC 输入端子 AC Input Terminal

符号	图示	螺钉扭矩
		13 Kgf. cm
AC/N		
AC/L		

■ 方框图 Block Diagram

